

Environmental Product Declaration



In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:

Vertically perforated clay masonry blocks “Keraterm”

from

LODE SIA



Programme:	The International EPD® System, www.environdec.com
Programme operator:	EPD International AB
EPD registration number:	S-P-12511
Publication date:	2024-02-06
Valid until:	2029-02-06

This EPD covers multiple products and is considered as a FAMILY EPD based on an average recipe



General information

Programme information

Programme:	The International EPD® System
Address:	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
Website:	www.environdec.com
E-mail:	info@environdec.com

Accountabilities for PCR, LCA and independent, third-party verification
Product Category Rules (PCR)
CEN standard EN 15804 serves as the Core Product Category Rules (PCR)
Product Category Rules (PCR): <i>Construction Products, PCR 2019:14 Version 1.3.2</i>
PCR review was conducted by: <i>The Technical Committee of the International EPD® System. See www.environdec.com/TC for a list of members.</i> <i>The review panel may be contacted via the Secretariat info@environdec.com</i>
Life Cycle Assessment (LCA)
LCA accountability: <i>Bureau Veritas Latvia SIA, riga@bureauveritas.com</i>
Third-party verification
Independent third-party verification of the declaration and data, according to ISO 14025:2006, via: <input checked="" type="checkbox"/> EPD verification by individual verifier Third-party verifier: <i>Elisabet Amat, GREENIZE</i> Approved by: The International EPD® System
Procedure for follow-up of data during EPD validity involves third party verifier: <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

Company information

Owner of the EPD: LODE SIA

Contact: Marita Junkere, Quality Manager, marita.junkere@lode.lv, +371 29153102

Description of the organisation: LODE is the leading manufacturer of ceramic building materials in the Baltics. LODE has two factories equipped with modern equipment and is using modern technologies to ensure the production of high-quality ceramic building materials, including facing bricks, finishing elements, pavers, and construction blocks under the brand name KERATERM. The newest of the factories is located in Jelgava municipality, where KERATERM construction blocks **considered in this EPD** are produced. Second LODE factory, located in Cēsis municipality, is the oldest among two factories, operating since 1958. Initially, the factory was built to produce drainage pipes, which were manufactured from 1963 to 1980. However, in 1968, the production of clay bricks has been launched and it continues to this day. LODE sells its products in Latvia and exports them to Lithuania, Estonia, Poland, Scandinavia, and other countries.

Product-related or management system-related certifications: (EU) Directive No.305/2011 applies for placing the product on the market in the EU/EFTA. The products require a Declaration of Performance taking consideration of the standards EN 771-1:2011+A1:2015 for facing bricks and blocks, EN 1344:2014/AC:2015 for clay pavers, and CE-marking.

Name and location of production site(s): Āne, Jelgava municipality, Latvia where KERATERM construction blocks considered in this study and respective EPD are produced.

Product information

Product name:

Vertically perforated clay masonry blocks “Keraterm”

Product identification:

KERATERM are enlarged ceramic bricks - blocks that come in nine different sizes and six different thicknesses. KERATERM blocks are easy to use in the construction process, as well as, if necessary, to saw and split to adapt to the required project. KERATERM blocks are vertically perforated ceramic (clay) masonry elements intended for masonry of external and partition walls of load-bearing and non-load-bearing buildings.

Product illustrations:

Building blocks Keraterm:



All KERATERM building blocks considered in this EPD have the same composition and manufacturing processes, only design is different.

Product description:

This EPD covers vertically perforated enlarged ceramic bricks produced at LODE SIA. Application of KERATERM blocks - masonry of external and partition walls of load-bearing and non-load-bearing buildings.

The technical parameters of the **KERATERM blocks** considered as a declared unit are:

Name	Value	Unit
Freeze/Thaw resistance	≥ 25 – 50	cycles
Gross density	700 - 1200	kg/m ³
Compressive strength	12.5 – 25	N/mm ²
Water absorption	≤ 25	%
Active soluble salts	SO	
Fire reaction	A1, non-flammable	

UN CPC code: 3731 - Bricks, blocks, tiles and other ceramic goods of siliceous earths

Additional codes: GTIN 475101027, NACE Code 2332 - Manufacture of fired clay building materials

Geographical scope: This EPD has a European Scope, as installation activities and primary raw materials are independent of the region where the products will be installed. Nonetheless, it must be clarified that transport distances to construction sites (module A4) in the model under study correspond to several construction sites in different parts of Europe.

LCA information

Functional unit / declared unit: 1000kg of Keraterm blocks

Reference service life: It has been assumed that reference service life is equal to estimated Service Life of building or the structure of intended use. Since this is not a cradle-to-grave EPD, RSL not mandatory to be reported. According to ISO 15686-1:2011, RSL would be 150 years.


Time representativeness: Data represents the manufacturing of the products in year 2022. The database used for proxy data is Ecoinvent v3.8. This database data is compiled in November 2021, i.e., no data is older than ten years.

Database(s) and LCA software used: Ecoinvent v3.8 has been used to conduct the quantitative evaluation in this study. This database provided the background system's life cycle inventory data for raw and processed materials. The LCA software used to obtain results of impact assessment - SimaPro 9.5.

Description of system boundaries: LCA study has been performed in the “Cradle-to-gate with options, modules C1 – C4 and module D” form. All major materials, production energy use, and waste are included for phases A1-A3, A4-A5, C1-C4 and D. Use stage (B1-B7) has not been considered for this study as it is not mandatory.

The processes related to infrastructure, construction, and production of equipment, as well as tools that are not directly consumed in the production process, have been excluded. Personnel-related activities, such as transportation to and from work, have been excluded.

System diagram:

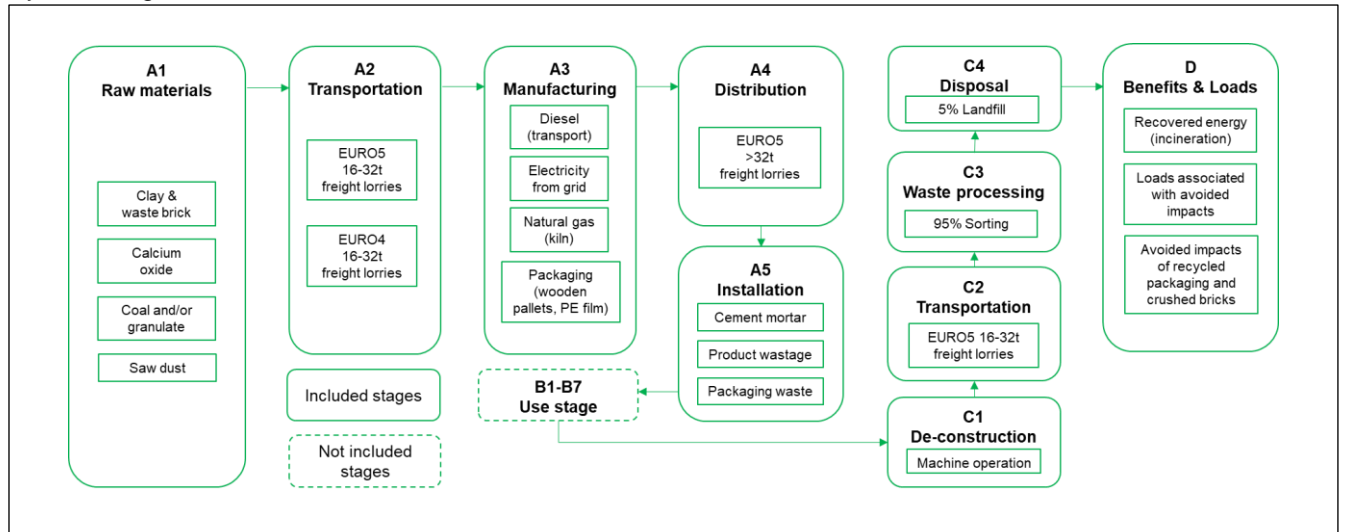

Data quality: The foreground data has been collected internally, considering the latest available average production amounts and measurements during the 2022. Data regarding waste processing has been taken from waste scenarios for closest locations in Ecoinvent v3.8. The quality level in this study is qualified as very good according to the UN Environment Global Guidance criteria on LCA database development. Data is geographically representative as it comes from the area of study. It is technically representative as it comes from processes and products under study using the same state of technology defined in goal and scope. According to the provided data, it is also time representative. Data quality rating procedure has been performed using a rating system where “1” means Excellent quality, and “5” means Poor quality. An average for each criterion is presented as follows:

Technological Representativeness, TeR	Geographic representativeness, GeR	Time Representativeness, TiR	Precision, P	Average DQR
2,18	2,15	2,00	2,65	2,24

Stages and Production description

Product Stage

Module A1 includes Raw material supply, i.e., production of raw materials. In module A1, extraction and processing of raw materials and generation of electricity and heat from primary energy resources to produce these raw materials are included. Raw materials for Keraterm blocks are: clay, saw dust, Calcium oxide, granulate (coal) and recycled fired brick. Materials used for packaging, considered in module A3, are polyethylene (PE) packaging film and wooden pallets.

In **Module A2**, transport type and distances from the locations of raw material and packaging suppliers to the LODE manufacturing plant in Āne, Latvia are included according to the data provided by manufacturer. Materials, distances and means of transportation are listed in the Table below:

Material	Type of vehicle	kgkm	Distance, km	Fuel consumption, l/tkm	Value, l/t
Plastic hoods (PE)	Lorry 16-32t, EURO5	1697,00	2565	0,0441	113,07
Wooden pallets	Lorry 16-32t, EURO5	1230,00	98	0,0441	4,32
Calcium oxide	Lorry 16-32t, EURO5	223,94	220	0,0441	9,70
Granulate	Lorry 16-32t, EURO5	108625,60	1000	0,0441	44,08
Saw dust	Lorry 16-32t, EURO5	6493,34	115	0,0441	5,07
Clay from clay pit	Lorry 16-32t, EURO4	6881,16	6	0,0441	0,26

Module A3 represents manufacturing stage. Keraterm blocks are composed mainly of clay, saw dust, coal granulate and additives (Calcium oxide) for the purpose of maintaining technical parameters during the reference service life of a product. Manufacturing of clay product includes temporary storage of raw materials, preparation of raw materials, forming by extrusion, drying, firing, sorting and packaging. For the purpose of heat generation for drying and firing manufacturer uses Natural gas.

Besides manufacturing of the blocks, this stage also declares waste flows of raw materials for reuse and quarry recultivation purposes. Waste treatment of packaging materials from incoming raw materials and emissions to air are also included. The waste scenario follows the data present in Ecoinvent v3.8 and considers information collected during manufacturing plant visit. Dataset includes processes associated with collection of waste and national (Latvia) scenario of waste treatment.

Greenhouse gas emissions from the use of Electricity in the manufacturing phase are represented by the National production mix that consists of import, medium voltage (production of transmission lines, in addition to direct emissions and losses in grid) of applied electricity for the manufacturing process (A3). No additional data has been provided on consumed electricity, therefore, emission factor acquired from Ecoinvent v3.8, representing GWP-GHG of Latvian electricity mix is 0.532 kgCO₂eq/kWh.

Construction process Stage

Table below describes the scenarios for **module A4** transportation of the final product and its packaging from LODE manufacturing plant in Latvia to Construction sites in Latvia, Lithuania and Poland. The distances to customers have been provided by manufacturer,

Country	Vehicle	kg*km	Distance, km	Fuel consumption, l/tkm	Value, l/t
Latvia	Lorry >32t, EURO5	202,44	125	0,0226	2,82
Lithuania	Lorry >32t, EURO5	806,52	280	0,0226	6,32
Estonia	Lorry >32t, EURO5	4,26	720	0,0226	16,24

Installation module A5 has also been considered in this study. According to Almeida et al, (2014) brick wall construction has been considered using the manufacturer's provided data on square meters, volume and weight of Keraterm blocks and required amount of mortar. It has been assumed that walls are constructed manually with the use of cement mortar seals. Considering provision of the product wastage described in Sub-PCR 2012:01 Bricks, blocks, tiles, flagstone of clay and siliceous earths, 3% wastage of the product has been included in Installation module along with additional production and transportation processes to compensate for the loss of wastage of product. Packaging waste and

environmental aspects linked to the transportation to waste processing and disposal facilities have also been considered in module A5.

Use Stage:

Modules B1-B7, that define use stage of the product, are not declared for this study – those are not mandatory for LCA “Cradle-to-gate with options” form.

End of Life Stage:

Module C1 assumes demolition process and associated fuel consumption for machine operation described by Ivanica et al. Case study includes specific operation time for heavy building machinery per 1 m² of building’s envelope that later is easily converted to Fuel consumption via Ecoinvent datasets.

Module C2 considers an average transport distance of 50 km by 16-32 metric ton EURO5 freight lorry.

After the deconstruction/demolition stage (C1), clay products are usually crushed (recycling process) towards secondary materials for another application (e.g., roadwork, concrete aggregates, etc.) replacing raw materials of similar application. **Module C3** accounts for the process of sorting of waste bricks.

Waste disposal (**module C4**) includes physical pre-treatment and management of the disposal site. Emissions from waste disposal are considered a part of the product system under study and, therefore, part of this module. 95% share of clay product waste is assumed to be reused, therefore, avoiding the use of similar infill raw materials used in roadwork, concrete etc. Only 5% of declared clay product waste material weight has been accounted for in waste disposal module C4 as landfilled inert waste.

Benefits and loads beyond the system boundaries:

This study is also considered the **D phase** (reuse, recovery, recycling, potential) where recycling and reuse of packaging material and avoided infill material for construction have been declared:

- 41.0% of PE packaging film considered as avoided impact via recycling of packaging waste;
- remaining part of plastic waste has been considered for Incineration in module A5, therefore, it has been also considered as avoided impact as recovered energy, both Electrical and Heat;
- crushed gravel has been considered as avoided infill material via reuse of crushed clay product, i.e., excluding landfilled share of 5% (module C4);
- wood packaging waste (wooden pallet) has been also considered for Incineration in module A5, therefore, it has been also considered as avoided impact as recovered energy, both Electrical (1.74 MJ/kg) and Heat (3.49 MJ/kg);
- Diesel, burned in a building machine, that is required for brick crushing, has been considered as load for avoided impact of crushed bricks.

Modules declared, geographical scope, share of specific data (in GWP-GHG results) and data variation (in GWP-GHG results):

	Product stage			Construction process stage		Use stage							End of life stage				Resource recovery stage
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	X	X	X	X	X	MND	MND	MND	MND	MND	MND	MND	X	X	X	X	X
Geography	EU	EU	LV	EU	EU	MND	MND	MND	MND	MND	MND	MND	EU	EU	EU	EU	EU
Specific data used	>90%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – products	<5%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – sites	NOT RELEVANT			-	-	-	-	-	-	-	-	-	-	-	-	-	-

Content information

Product components	Weight, kg	Post-consumer material, weight-%	Biogenic material, weight-% and kg C/kg
Clay	940,44	0%	0% 0.0
Granulate	58,55	0%	0% 0.0
Calcium oxide	1,01	0%	0% 0.0
TOTAL	1000,00	0%	0% 0.0
Packaging materials	Weight, kg	Weight-% (versus the product)	Weight biogenic carbon, kg C/kg
Wooden pallets	12,55	1,255%	0,475
Packaging film, LDPE	0,66	0,066%	
TOTAL	13,21	1,321%	0,475

No dangerous substances from the candidate list of SVHC for Authorization have been identified.

Environmental Information

Potential environmental impact – mandatory indicators according to EN 15804

Results per functional or declared unit									
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-fossil	kg CO ₂ eq.	1,5E+02	1,8E+01	4,2E+01	8,8E+00	6,9E+00	1,6E+00	2,5E-01	-1,4E+01
GWP-biogenic	kg CO ₂ eq.	1,7E-01	1,1E-03	5,5E-02	6,1E-04	4,0E-04	7,6E-03	3,6E-05	-3,3E-02
GWP-luluc	kg CO ₂ eq.	5,8E-02	1,5E-04	2,2E-02	2,2E-04	5,6E-05	3,2E-03	9,6E-04	-1,5E-02
GWP-total	kg CO ₂ eq.	1,5E+02	1,8E+01	4,2E+01	8,8E+00	6,9E+00	1,7E+00	2,5E-01	-1,4E+01
ODP	kg CFC 11 eq.	1,7E-05	4,3E-06	2,2E-06	2,0E-06	1,6E-06	1,4E-07	5,0E-08	-1,6E-06
AP	mol H ⁺ eq.	3,5E-01	6,1E-02	1,2E-01	3,8E-02	2,4E-02	1,1E-02	2,0E-03	-6,5E-02
EP-freshwater	kg P eq.	5,7E-03	9,2E-06	5,8E-04	6,1E-06	3,5E-06	1,4E-04	1,3E-06	-7,1E-04
EP-marine	kg N eq.	9,3E-02	1,9E-02	3,4E-02	1,4E-02	7,7E-03	2,4E-03	8,6E-04	-1,1E-02
EP-terrestrial	mol N eq.	1,0E+00	2,1E-01	3,9E-01	1,6E-01	8,5E-02	2,7E-02	9,4E-03	-1,3E-01
POCP	kg NMVOC eq.	3,2E-01	5,8E-02	1,0E-01	4,5E-02	2,3E-02	7,4E-03	2,6E-03	-3,8E-02
ADP-minerals&metals*	kg Sb eq.	4,6E-06	7,8E-07	5,6E-05	4,5E-07	3,0E-07	8,9E-08	1,7E-08	-2,0E-06
ADP-fossil*	MJ	4,8E+03	2,5E+02	3,2E+02	1,2E+02	9,8E+01	3,3E+01	3,3E+00	-2,5E+02
WDP*	m ³	7,1E+00	-4,3E-02	7,1E+00	3,1E-02	-1,6E-02	3,1E-01	2,0E-03	-1,5E+01
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption								

* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

Note: GWP-biogenic results have been balanced out in accordance with following approach – characterization factors for uptake and release of biogenic Carbon dioxide have been set to zero.

Potential environmental impact – additional mandatory and voluntary indicators

Results per functional or declared unit									
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-GHG ¹	kg CO ₂ eq.	1,4E+02	1,8E+01	4,1E+01	8,7E+00	6,9E+00	1,6E+00	2,4E-01	-1,4E+01
EP-freshwater	kg PO ₄ ³⁻ eq.	1,7E-02	2,8E-05	1,8E-03	1,9E-05	1,1E-05	4,4E-04	3,9E-06	-2,2E-03

Additional voluntary indicators e.g. the voluntary indicators from EN 15804 or the global indicators according to ISO 21930:2017

Use of resources

Results per functional or declared unit									
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
PERE	MJ	7,3E+00	2,8E-01	5,8E+01	2,9E-01	8,9E+00	1,5E-01	1,1E-01	5,1E+00
PERM	MJ	1,6E+02	9,3E-02	3,0E+02	9,7E-02	1,6E+01	5,0E-02	3,7E-02	7,2E-01
PERT	MJ	1,6E+02	3,8E-01	3,6E+02	3,9E-01	2,5E+01	1,9E-01	1,5E-01	5,8E+00
PENRE	MJ	3,2E+03	2,4E+02	1,3E+03	2,5E+02	3,2E+02	1,2E+02	9,8E+01	3,3E+01
PENRM	MJ	2,1E-02	1,0E-04	2,2E-02	1,1E-04	6,4E-02	6,9E-04	4,1E-05	8,7E-05
PENRT	MJ	3,2E+03	2,4E+02	1,3E+03	2,5E+02	3,2E+02	1,2E+02	9,8E+01	3,3E+01
SM	kg	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00
RSF	MJ	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00
NRSF	MJ	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00
FW	m ³	7,2E-02	6,3E-04	2,4E-01	6,5E-04	1,8E-01	1,9E-03	2,5E-04	2,4E-02
Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water								

¹ This indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO₂ is set to zero.

Waste production and output flows

Waste production

Results per functional or declared unit									
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
Hazardous waste disposed	kg	2,3E-03	6,7E-04	2,3E-04	3,2E-04	2,6E-04	1,9E-05	8,8E-06	-2,3E-04
Non-hazardous waste disposed	kg	2,6E+02	1,0E-02	9,7E+00	7,4E-03	4,0E-03	4,1E-02	5,0E+01	-3,5E-01
Radioactive waste disposed	kg	4,8E-03	1,8E-03	9,9E-04	8,6E-04	7,0E-04	2,4E-04	2,3E-05	-1,2E-03

Output flows

Results per functional or declared unit									
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
Components for re-use	kg	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00
Material for recycling	kg	0,0E+00	0,0E+00	2,9E+01	0,0E+00	0,0E+00	9,5E+02	0,0E+00	0,0E+00
Materials for energy recovery	kg	0,0E+00	0,0E+00	1,3E+01	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00
Exported energy, electricity	MJ	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	2,3E+01
Exported energy, thermal	MJ	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	4,5E+01

Other environmental performance indicators

Biogenic carbon content


Results per functional or declared unit	
Biogenic carbon content	Quantity
Carbon content in product, kg C	0,00
Carbon content in accompanying packaging, kg C	6,28

Note: 1 kg of biogenic carbon is equivalent to 44/12 kg CO₂

LCA Interpretation

The estimated impact assessment results are only relative statements that do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins, or risks.

Contribution to environmental impact per each module for declared unit of **Keraterm blocks** is displayed in following Figure:

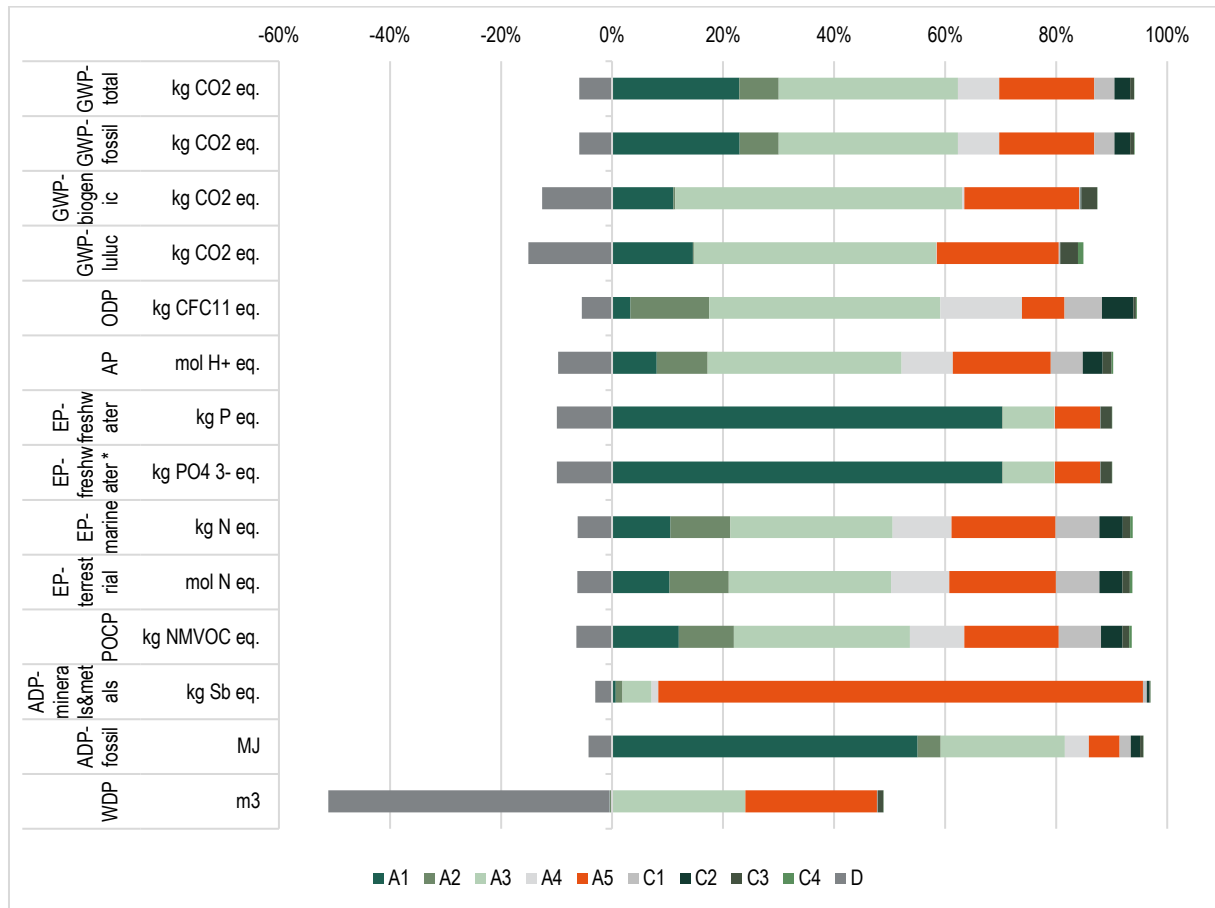


Contribution to environmental impact per each module for DU of Keraterm blocks

Considering location of own clay pit, transportation to manufacturing plant (A2) is not a major contributor to environmental impact, excl. Ozone depletion potential and Eutrophication potential (marine and terrestrial), where module A2 results in approximately 10% of total impact. Major contributors to the total impact of each mandatory impact category are manufacturing module A3 and raw material module A1, with the former represented mainly by the use of Electricity from the grid and fossil fuels (Natural gas, Diesel). 34% of total impact in Global warming potential of Keraterm blocks is resulting in manufacturing module A3, while Installation stage (A4-A5) is contributing another 26%. Raw materials in module A1 are accountable for 24% of the total GWP impact.


Considering total demand of primary energy per declared unit, that has been calculated using Cumulative Energy Demand (LHV) V1.00 impact assessment method, demand of primary energy (displayed in following Figure) is distributed as follows:

- 86% for Product stage (A1-A3)
- 10% for Construction process stage (A4-A5)
- 4% for End-of-life stage (C1-C4)

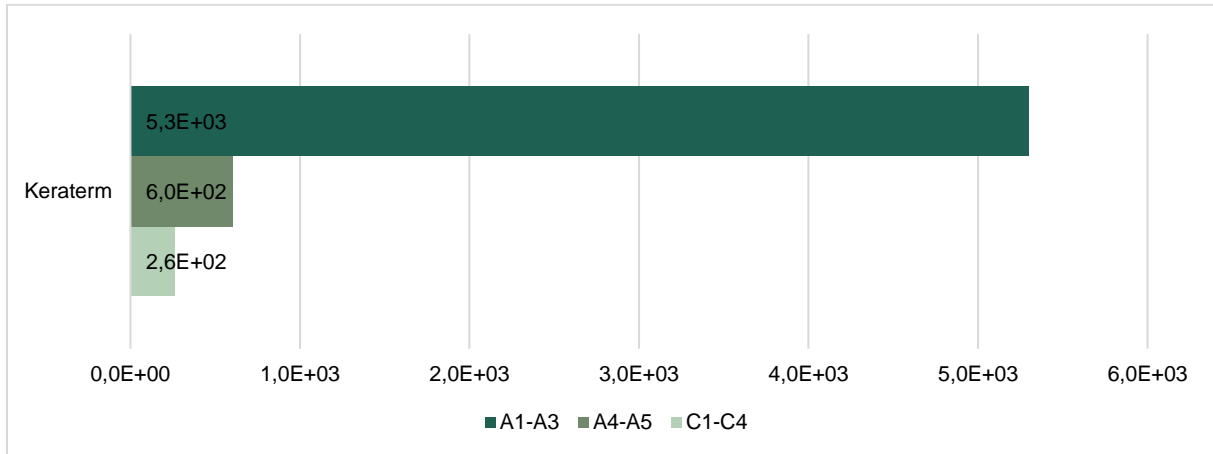

Primary energy demand per DU of Keraterm blocks, aggregated

Another key effect factor is Freshwater consumption, that is displayed in following Figure as a Waterfall chart. A waterfall chart shows a running total as values are added or subtracted. It's useful for understanding how an initial value of net Freshwater use is affected by a series of positive and negative values. In case of Keraterm blocks no values has been subtracted as each module only adds up to total use. In terms of freshwater use levels, the Product stage (A1-A3) is responsible for most of its demand with 60% share, with 34% resulting in Installation module A5.

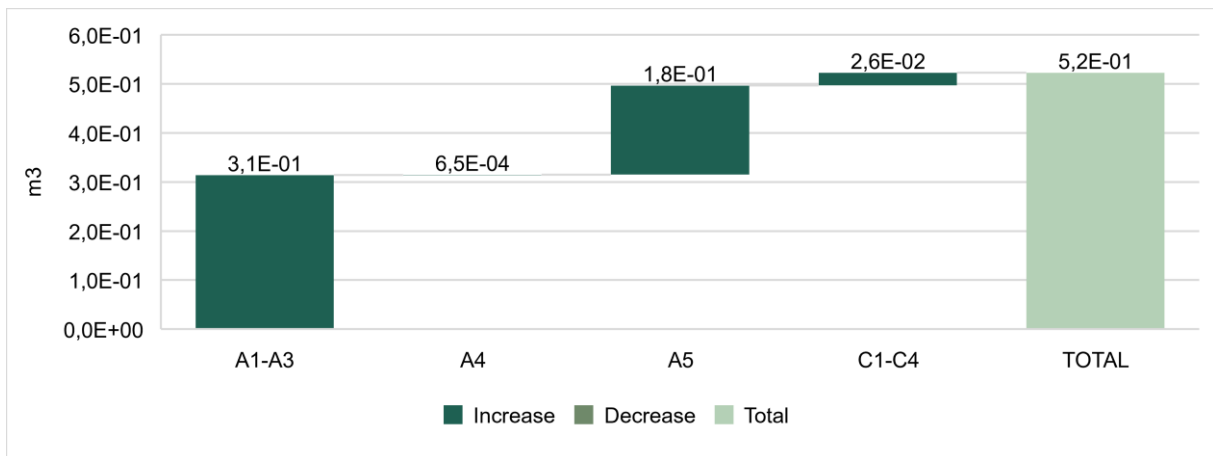

Net freshwater use for Keraterm blocks, aggregated

Additional environmental information

- Products must be used for the intended purposes, in compliance with the applicable standards and building codes (and/or other norms and regulations) that apply to the specific product and/or region.
- Products do not require additional maintenance with special means.
- Products do not rot, mold or decompose under the influence of UV radiation.
- Manufacturing company constantly implements energy efficiency measures that reduce energy consumption and corresponding CO₂ emissions.
- Mandatory Energy audit of enterprise has been conducted in 2022 in accordance with Cabinet Regulation No. 487 "Regulations Regarding Energy Audit of Enterprises". Local legislation mandates large enterprises and large consumers of electricity to conduct energy audit once in 4 years or implement certified Energy management system in accordance with ISO 50001.
- In accordance with Cabinet Regulation No. 769 "Regulations Regarding Participation of Stationary Technological Installations in the Emission Allowance Trading Scheme of the European Union", report on GHG Emissions is issued on annual basis.
- Manufacturing company has obtained licenses for the extraction of minerals, as well as a permit for polluting activities (Category A) and operates in accordance with them.

Information related to Sector EPD

This is an individual EPD.

Differences versus previous versions

This is the first version of EPD.

References

General Programme Instructions of the International EPD® System. Version 4.0.

PCR 2019:14. Construction products. V1.3.2

SUB-PCR TO PCR 2012:01 Bricks, blocks, tiles, flagstone of clay and siliceous earths (construction product) – **for understanding general approach only, expired**

Marisa Isabel Almeida et al. (2014) Contribution to the development of product category rules for ceramic Bricks. *Journal of Cleaner Production* 92 (2015) 206-215

Raphaela Ivanica et al. (2022) Development of a life cycle inventory database and life cycle impact assessment of the building demolition stage: A case study in Germany. *Journal of Cleaner Production* 338 (2022) 130631

EN 15804:2012+A2:2019. Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products.

Yahong D. et al., (2021). Developing Conversion Factors of LCIA Methods for Comparison of LCA Results in the Construction Sector.

ISO 14040:2006. Environmental management – Life cycle assessment – Principles and framework

ISO 14044:2006. Environmental management – Life cycle assessment – Requirements and Guidelines.

LCA software SimaPro 9.5.0.2, Ecoinvent v3.8

ISO 14025:2006: Environmental labels and declarations - Type III environmental declarations - Principles and procedures

Šiškins A., (2024) LCA background report v2.1 for LODE SIA Vertically perforated clay masonry blocks “Keraterm”

